




Bel-Air Combo Blue Foam

2.0MM Blue Foam With PE Vapor Barrier Film.

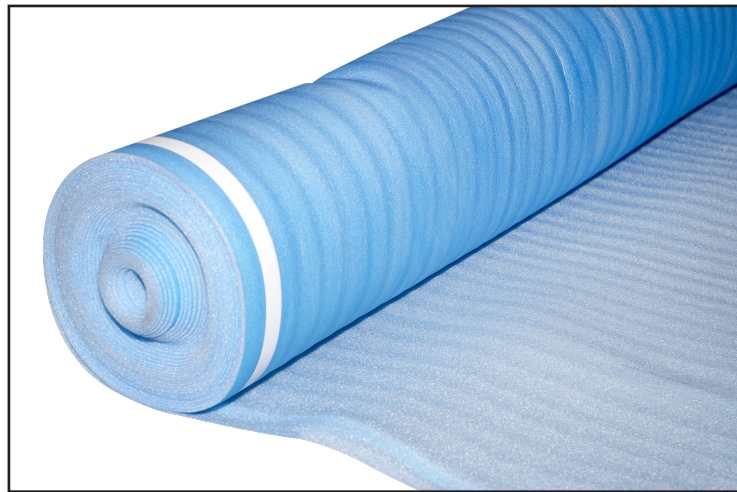

Bel-Air Combo Blue Foam is a basic acoustic foam underlayment combined with a PE vapor barrier film. Used to as a cushion between floating floors and the sub floor below, helps reduce flooring noises and provide moisture barrier when application requires.

ROLL DIMENSIONS:

Ft.2 Per Roll: 200

Thickness: 2.0mm.

Density: 24kg/m³

Width: 45" (3.75Ft.)

Length: 636" (53.3 Ft.)

Weight: 2 lbs.

Rolls/Pallet: 50 Rolls

Pallet Dimensions:

Length: 48" **Width:** 42"

Height: 72"

FEATURES:

100% Vapor Barrier

100% Electrical Insulator

100% Mold & Mildew Resistant

100% Environment friendly

Sound & Impact Properties

Impact Insulation Class (IIC): 51dB | Sound Transmission Class (STC): 54dB

CLASSIFICATION STANDARD

STC Classification: ASTM E90-04, 54dB

IIC Classification: ASTM E492-04, 51dB

Thermal Conductivity: 0.20 BTU/Hr.Sq.In

Fire Resistance: UL 94 HFI, F.A.R. 25.83

Water Absorption: 0.003 Lbs Per Cubic Feet



Bel-Air Combo Blue Foam

2.0MM Blue Foam With PE Vapor Barrier Film.



Basic acoustic foam underlayment combined with a PE vapor barrier film. Used to as a cushion between floating floors and the sub floor below, helps reduce flooring noises and provide moisture barrier when application requires.



Impact
Insulation
Class (IIC): **51dB**



Sound
Transmission Class
(STC): **54dB**



100%
Environment
friendly



100% Mold
& Mildew
Resistant



100%
Electrical
Insulator



100%
Vapor
Barrier